

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number
WO 2005/073489 A1

(51) International Patent Classification⁷: **E05B 63/08**,
65/06, 59/00, 13/00

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(21) International Application Number:
PCT/AU2004/000107

(22) International Filing Date: 30 January 2004 (30.01.2004)

(25) Filing Language: English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English


(71) Applicant (for all designated States except US): **ASSA ABLOY AUSTRALIA PTY LIMITED** [AU/AU]; 50 Edward Street, Oakleigh, Victoria 3166 (AU).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A THREE MODE LOCK

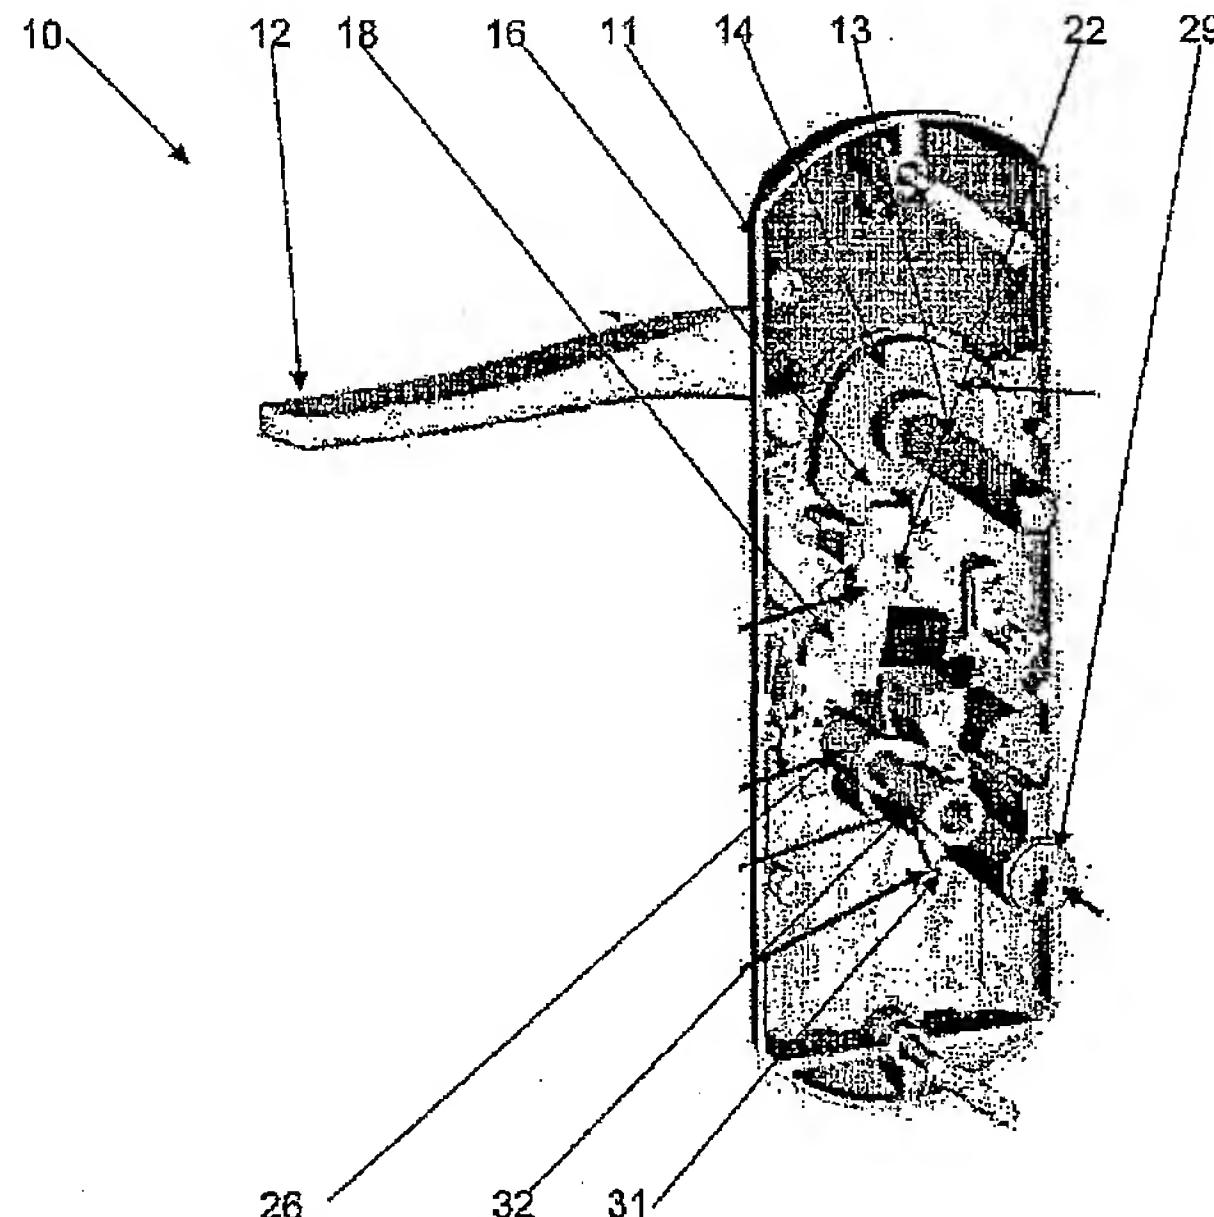

(57) Abstract: A door lock (10) having a lock body (11), an external handle and an internal handle (12), a rotatable interconnecting member (13) to interconnect the internal handle and the external handle, and a mechanism to allow the lock to have a passage mode, and a privacy mode and a deadlock mode, in one embodiment the mechanism comprises an outer hub (14) and an internal hub (15) which are inside the lock body, in a second embodiment a remote control means is provided to allow at least some of the modes to be operated manually or by remote control.

WO 2005/073489 A1